




4TNV88D-XMYAM-PIH




GROSS POWER hp (kW)	35 (26.1)
FUEL CONSUMPTION GAL/H (L/H)	2 (7.6)
REGULATION	Final Tier 4
CYLINDERS	4
BORE X STROKE (mm)	88 X 90
DISPLACEMENT L (ci)	2.2 (133.6)
RATED SPEED rpm	2,600
COMBUSTION TYPE	Direct Injection
ASPIRATION	Natural Aspiration
GOVERNOR TYPE	Electronic
LUBRICATION SYSTEM	7.4L Capacity Oil Pan
ELECTRICAL SYSTEM	12V-55A
FUEL SYSTEM	Common Rail Fuel Injection
COOLING SYSTEM	Water Pump Belt Drive
AUX DRIVE	SAE A 2B9T
POWER TAKE OFF	FWH: SAE 5 Full FW: SAE 7.5
LENGTH w/fan in (mm)	35.2 (897)
WIDTH in (mm)	27.5 (698.4)
HEIGHT in (mm)	36.82 (935.2)
WEIGHT (DRY) lbs (kg)	550 (249)

TORQUE

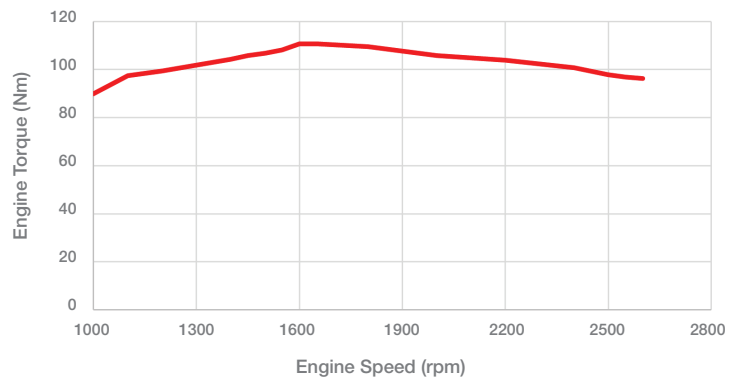

POWER

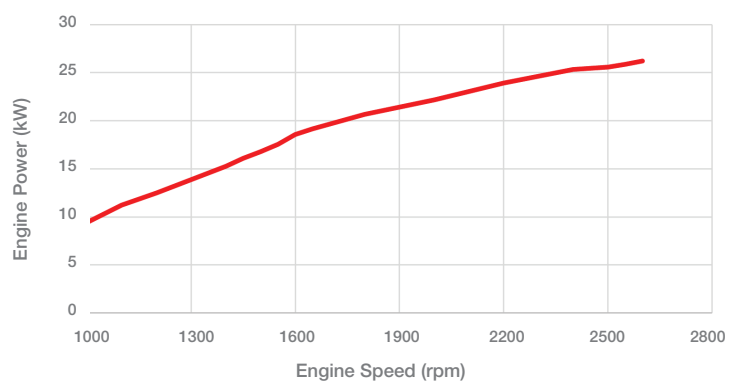

PURE. RELIABLE. POWER.



STANDARD KITS

Air Cleaner Kit: KAC28

Engine Foot Kit: KF2

ATD Mount Kit: KATD3

Radiator Kit: KR21

Radiator Mount Kit: KRM9A

ECU Harness Kit: KPH9

Harness Kit: KPH23

OPTIONAL KITS Available Separately

Monochrome Panel: KP8, KP8E, KP8N, KP8-AS, KP8E-AS

Color Panel: KP9, KP9N, KP9E, KP9-S

Harness Kit: KPH10 (5FT EXT)

Harness Kit: KPH11 (10FT EXT)

SAR-Adaptor Harness Kit: KPH12

