


JD14 & JD18 Marine Engines

298 – 599 kW (400 – 803 hp)

A NEW ERA IN POWER

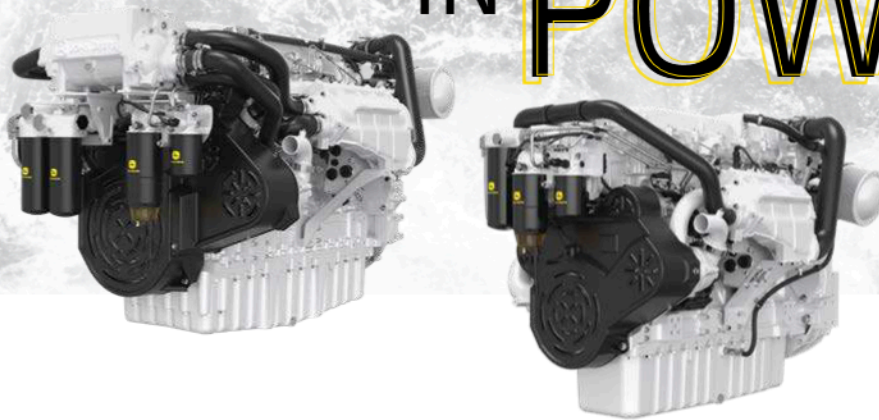

Announcing the all-new John Deere JD14 and JD18 marine engines. They're built to take your marine propulsion, auxiliary, and generator applications to the next level.

POWERFUL PERFORMANCE.

JD14 engines have **higher duty cycles** and more power than John Deere 13.5L models.

JD18 engines are built for heavy-duty commercial marine applications up to 599 kW (803 hp).

High-pressure common-rail (HPCR) provides flexible injection timing and excellent efficiency.

MACHINE AVAILABILITY.

John Deere Connected Support™ remote monitoring and diagnostics comes standard. It provides protection and efficiency with no subscription fees or ongoing expenses.

John Deere JD14 and JD18 engines provide **excellent fuel economy**.

The JD18 has independent cooling for jacket water and aftercooling systems.

LOW MAINTENANCE.

Longer oil change service intervals up to 500 hours when you use John Deere Plus-50™ II engine oil.

Rigid bronze impeller on seawater pump with up to 10,000-hour life before needing maintenance.

Hydraulic automatic valve lash adjustment improves durability and eliminates valve lash maintenance.

EASY INTEGRATION.

The JD14 marine engine features a reduced package size compared to the John Deere 13.5L.

The on-board ECU and compact service center box provides easy wiring and integration.

Standard front side service for oil and filter maintenance.



JOHN DEERE

	JD14P	JD14X	JD18P
General data			
Type	6-cylinder, In-line, 4-valve, 4-stroke diesel		
Displacement	13.6L	13.6L	18.0L
Fuel system	Electronic high-pressure common-rail (HPCR)		
Gear train	Rear gear train – 2 PTOs		
Cooling	Keel cooled or Heat exchanger	Heat exchanger	Keel cooled or Heat exchanger
Aftercooler	Air-to-coolant	Air-to-seawater	Air-to-coolant (separate circuit)
Turbocharger	Single-stage water cooled (fixed)		
Performance			
Rated power	298 – 448 kW (400 – 600 hp) @ 1800 – 2100 rpm	523 – 599 kW (700 – 803 hp) @ 2100 – 2200 rpm	410 – 599 kW (550 – 803 hp) @ 1800 – 2100 rpm
Service interval	Up to 500 hours with John Deere Plus-50™ II engine oil		
Emissions technology			
Certification	IMO Tier 2 / EPA Tier 3 / EU RCD 2		
Classifications	ABS, DNV-GL, LR		
EGR	No		
Aftertreatment	No		
Specifications			
Dimensions (L x W x H)	1750 x 1128 x 1192 mm (69 x 44 x 47 in)	1750 x 1095 x 1192 mm (69 x 43 x 47 in)	2063 x 1321 x 1298 mm (81 x 52 x 51 in)
Weight	~1436 kg (3166 lb)	~1489 kg (3283 lb)	~2100 kg (4630 lb)

Preliminary information. Specifications are subject to change. Dimensions may vary based on options selected.

This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL AUTHORIZED JOHN DEERE DEALER OR DISTRIBUTOR FOR DETAILS. John Deere reserves the right to change specification, design and price of the products described in this literature without notice. John Deere's green and yellow color schemes, the leaping deer symbol, and JOHN DEERE are trademarks of Deere & Company.



JOHN DEERE

